

↔		↔		⌚		⤴		⌚		⚖	
mm	inch	mm	inch	bar	psi	mm	inch	%	kg/m	lb/ft	
51	2	69	2,72	40	600				1,840	1,240	
76	3	104	4,09	40	600				4,390	2,955	
90	3 1/2	118	4,65	40	600				5,150	3,465	
102	4	130	5,12	40	600				5,830	3,920	

NA	LA	NEU	EMEA	SA	AP	AU
----	----	-----	------	----	----	----




**737AA**  
Concrete pumping 40 bar (600 psi)

**Tube:** Black conductive NR - abrasion resistant  
**Reinforcement:** High tensile textile cords  
**Cover:** Black conductive SBR/NR - abrasion and ozone resistant  
**Use:** Concrete pumping  
**Safety factor:** 2,5:1  
**Temperature:** -30 °C +80 °C (-22 °F +176 °F)

↔		↔		⌚		⤴		⌚		⚖	
mm	inch	mm	inch	bar	psi	mm	inch	%	kg/m	lb/ft	
51	2	69	2,72	85	1275	255	10,00		2,130	1,435	
63	2 1/2	85	3,35	85	1275	265	10,50		3,340	2,245	
76	3	100	3,94	85	1275	380	15,00		4,540	3,055	
90	3 1/2	116	4,57	85	1275	450	17,50		5,490	3,690	
102	4	126	4,96	85	1275	510	20,00		6,530	4,390	
127	5	153	6,02	85	1275	635	25,00		9,740	6,550	
127	5	155	6,10	85	1275	635	25,00		10,340	6,950	
152	6	184	7,24	85	1275	760	30,00		13,780	9,265	

NA	LA	NEU	EMEA	SA	AP	AU
----	----	-----	------	----	----	----

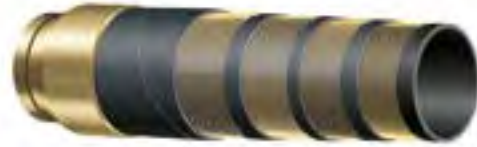

**740AA**  
Concrete pumping 85 bar (1275 psi)  
heavy duty - steel reinforced

**Tube:** Black conductive NR - abrasion resistant  
**Reinforcement:** High tensile steel cords  
**Cover:** Black conductive SBR/NR - abrasion and ozone resistant  
**Use:** High pressure concrete pumping  
**Safety factor:** 2:1  
**Temperature:** -30 °C +80 °C (-22 °F +176 °F)

↔		↔		⌚		⤴		⌚		⚖	
mm	inch	mm	inch	bar	psi	mm	inch	%	kg/m	lb/ft	
51	2	69	2,72	85	1275	255	10,00		2,590	1,745	
63	2 1/2	85	3,35	85	1275	325	13,00		3,770	2,535	
76	3	100	3,94	85	1275	380	15,00		4,970	3,345	
90	3 1/2	116	4,57	85	1275	450	17,50		7,220	4,855	
102	4	128	5,04	85	1275	510	20,00		7,660	5,150	
127	5	155	6,10	85	1275	635	25,00		10,250	6,890	

NA	LA	NEU	EMEA	SA	AP	AU
----	----	-----	------	----	----	----



**741AA**  
Concrete pumping 85 bar (1275 psi)  
extra service - steel reinforced

**Tube:** Black conductive NR - abrasion resistant  
**Reinforcement:** High tensile steel cords  
**Cover:** Black conductive SBR/NR - abrasion and ozone resistant  
**Use:** High pressure concrete pumping.  
 Designed for long service life in heavy duty applications  
**Safety factor:** 2,5:1  
**Temperature:** -30 °C +80 °C (-22 °F +176 °F)