

Brass 'Y' Strainer


Material List	
PART	MATERIAL
Body	Brass
Mesh	304 Stainless Steel

Specifications	
Thread	AS1722.2
MAX Working Temperature	100°C
Cold Working Pressure	1600kPa



Applications - Filtering Fluid to Protect inline valving

Brass 'Y' Strainer						
AAP CODE	IMPERIAL SIZE	L	H	MESH DIAMETER	MESH CENTRE TO CENTRE	APPROX. KG/PC
VBY10	3/8	47	31	0.8	1	0.07
VBY15	1/2	65	34	0.8	1	0.23
VBY20	3/4	80	42	0.8	1	0.35
VBY25	1	96	48	0.8	1	0.59
VBY32	1 1/4	104	55	0.8	1	0.83
VBY40	1 1/2	116	66	0.8	1	1.19
VBY50	2	140	74	0.8	1	1.95
VBY65	2 1/2	168	85	0.8	1	2.38

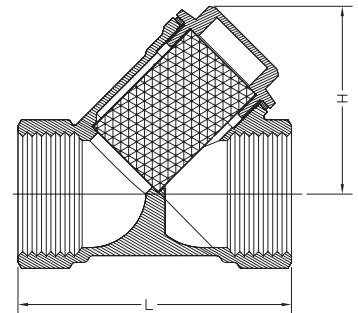

Stainless Steel 'Y' Strainer

Material List	
PART	MATERIAL
Body	CF8M
Cap	CF8M
Gasket	PTFE
Mesh	316 Stainless Steel

Specifications	
Thread	AS 1722.1
MAX Working Temperature	230°C
Cold Working Pressure	5500kPa



Stainless Steel 'Y' Strainer						
AAP CODE	IMPERIAL SIZE	L	H	MESH CENTRE TO CENTRE	MESH DIAMETER	APPROX. KG/PC
SSY15	1/2	65	51	2	1	0.2
SSY20	3/4	80	60	2	1	0.33
SSY25	1	90	72	2	1	0.7
SSY32	1 1/4	105	77	2	1	0.9
SSY40	1 1/2	120	87	2	1	1.4
SSY50	2	140	103	2	1	2.4
SSY65	2 1/2	170	112	2	1	4.7
SSY80	3	195	129	2	1	7.3

